

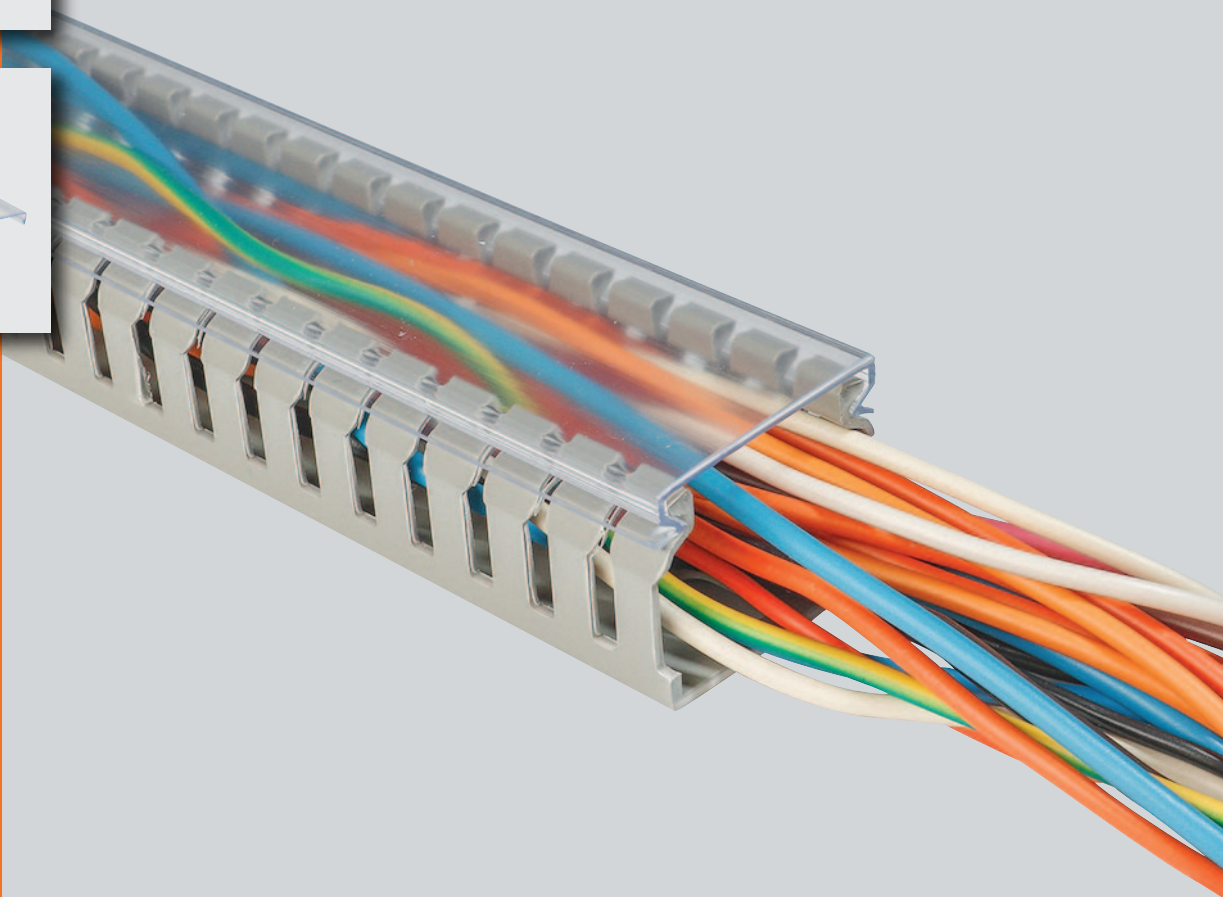




Transparent lids

for GN, GF-DIN and GF trunking

11/24 - 0360 003 0050E




SES-STERLING [®]
www.ses-sterling.com




Transparent lids

Visibility and control of cable integrity


Material:	hard PVC
Operating temperatures :	-20 to +60°C
Specifications:	V0 UL94
Standard length:	1 meter

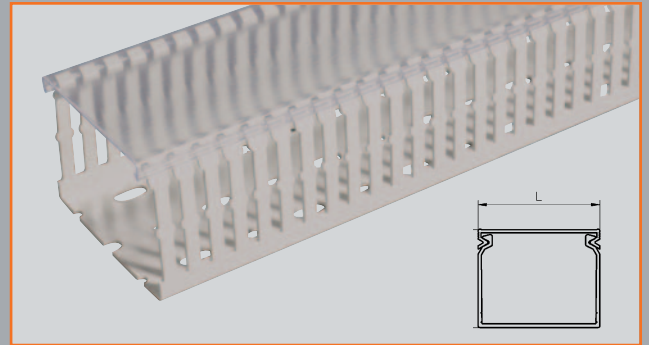

• Lids GN

type	article number	L mm	 m
GN 25	0839 1500 011	25	4
GN 30	0839 1505 011	30	4
GN 40	0839 1510 011	40	4
GN 60	0839 1520 011	60	4
GN 80	0839 1530 011	80	4
GN 100	0839 1540 011	100	4
GN 120	0839 1550 011	120	4
GN 150	0839 1560 011	150	4

• Lids GF-DIN and GF


type	article number	L mm	 m
GF-DIN 25	0845 1640 011	23	4
GF-DIN 37,5	0845 1645 011	35,5	4
GF-DIN 50	0845 1650 011	48	4
GF-DIN 75	0845 1655 011	73	4
GF-DIN 100 & GF 100	0845 1630 011	98	4
GF-DIN 125	0845 1665 011	123	4
GF-DIN 150 & GF 150	0845 1637 011	150	4

Applications

Transparent covers allow you to check the condition of cable bundles in trunking at a glance, without removing the cover.

Potential environmental damage, pests (rodents, etc.), outbreaks of fire or suspicious smoke: everything is visible and under control.

The system can be used for a wide range of applications, both indoors and outdoors (not directly exposed to UV light), in control cabinets and switchboards, or in the railway industry.

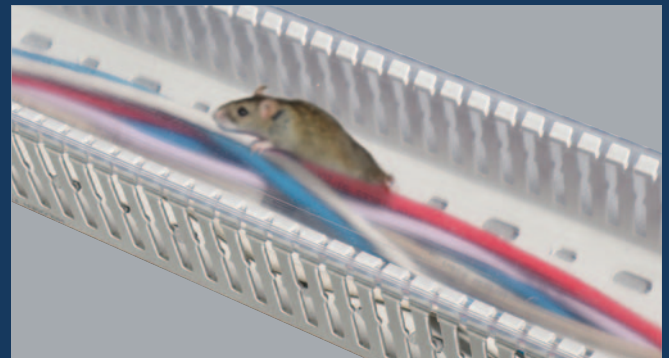

Compatible trunking

The transparent lids are designed for use with our cable trunkings:

GN-A6/4
(page C1/1-01)




GF-DIN-A7/5
(page C1/2-01)



GF-DIN-C-A12/8
(page C1/2-05)



GF-A12/8
(page C1/3-01)



GF-DIN-PPDA
(page C1/5-01)



GN-S
(page C2/1-01)

